

21942 Rev.20230822

by Agus Noviana

Submission date: 22-Aug-2023 10:45PM (UTC+0700)

Submission ID: 2149486196

File name: Final_Revision.docx (1.43M)

Word count: 3367

Character count: 16929

This study investigates the performance of compressor enclosure for noise absorption, reverberation and machine ventilation to ensure a safe and healthy working environment for people. The Multi pro air compressor model BC 150 DMBW 1.5 HP is placed in an enclosure made of wood board and for absorbing material use 6 cm thick of polyurethane pyramid foam. A fan with a flow rate of 280 CMH is used as a cooling medium and will operate simultaneously with the compressor operation. Flow Air Delivery (FAD) of compressor is 126 L/min. The sound pressure level (SPL) value is determined using a sound level meter., before and after the compressor uses the enclosure. In addition, the room temperature of the enclosure is also recorded, within 30 minutes of operation, to determine whether there is a significant increase in heat to ensure that the use of the enclosure for this compressor is still within safe limits. Based on the test results, it is known that after 30 minute operation, temperature rise from 29°C to 65°C in the inlet, on enclosure with fan off and temperature rise from 29°C to 51°C on enclosure with fan on. While from the results of measuring the sound noise level, taken at a distance of 1 meter outside the enclosure, there is no significant difference, with or without using a fan, the decrease in sound noise level is only about 10 dB, which is 84 dB before using the enclosure, to 74 dB after using the enclosure. So it can be concluded that, the use of fans as coolers, is quite effective in maintaining the temperature of the enclosure space, when compared to natural cooling through ventilation, but, the use of enclosures using pyramid foam material is not effective for reducing the noise level produced by the compressor when operating.

Introduction

This study focuses on compressor enclosure performance. Thermal control was the main design hurdle for this product. The enclosure becomes increasingly hot from the heat generated, which could harm the compressor. Such overheating can cause product failure in addition to shortening life expectancy. The purpose of this study is to determine whether enclosing the compressor and employing an acoustical enclosure with absorber material will limit noise propagation from the compressor to the surroundings. Almost always, it is discovered that the main applications of acoustical materials involve the decrease of reverberant, sound pressure levels and, as a result, the reduction of reverberation time in enclosures (rooms). Noise pollution is getting worse as society develops and industrialisation advances, which has a negative impact on people's ability to go about their daily lives and work. Four major environmental pollution causes are acknowledged: pollution of the solid waste stream, the air, the water, and the noise. Currently, people often control noise in one of these three ways: Three steps are involved for controlling noise: controlling the noise source, controlling the noise as it travels, and controlling the noise at the receptor itself. [1]. Research on the use of enclosures to reduce the noise level of compressor sound has been carried out by researchers around the world. A study on The environmentally friendly melamine cotton, which has never been widely used, is selected as the sound-absorbing material during the design phase [2]. The addition of an acoustical absorption layer inside an enclosure not only increases the damping of enclosed air volume but also

has an effect on the noise resonance transmission across enclosure walls [3], analysis of noise caused by the compressor and how distribution of sound frequencies with and without the use of enclosure was done, and then compared with standard values to help choose the best absorber material. This method is in accordance with the in situ assessment techniques for noise generated by different sources. A second order analyzer was used to study the recorded sound pressure level (SPL) values, and to demonstrate which frequencies can be most important in designing the enclosure. Reaching a noise reduction to 25 dB by using the absorber material of mineral wool as an extra liner on the inside of the enclosure is a sign of increasing the effectiveness of the enclosure in compressor's noise control. In order to create a better trap for low frequency noise, the thickness and density of absorber should be increased. [4]. The normal static pressure appears hits the object causing pressure change in the air thus propagating a sound wave through the vibration back and forward by the object [2].

Youngjoo et al. prepared a nanofiber fabric through an electrostatic process with melt spin polyamide fibers of nano diameters, and then examined the effect of layers of nanofiber webs regular fiber knitted fabric on sound absorption [6]. Liang and Jiang studied the propagation process and the law of acoustic wave in inorganic particle filled polymer composites, and put forward the sound insulation mechanism of polymer or inorganic particle composites [7]. Saetung et al. synthesized a polyurethane foam based on natural rubber. The effects of rubber particle size and formula parameters on its morphology mechanical properties



and sound absorption properties were studied. Qin Dong et al successfully prepared a kind of porous acoustic absorption ceramics by gel injection molding method. The first sound absorption frequency is about 2500Hz with peak value of 0.98, and the noise reduction coefficient (NRC) can achieve 0.6 [8].

Experimental and Procedures

Materials and Methods

Acoustic Enclosures are extremely effective made-to-order solutions that block and absorb sounds coming into and going out of a space.

Figure 1 depicts the waveform of a straight forward sine wave, which sounds like a pure tone, such as a whistle [9].

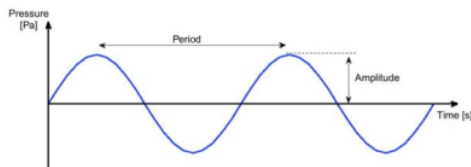


Figure 1. Simple wave motion – in this diagram the horizontal axis represents time.

The horizontal axis denotes time, and the vertical axis shows pressure variations, expressed in Pascal.

The three fundamental properties of sound are frequency, amplitude, and wavelength. The number of oscillations (or cycles) per second is referred to as a wave's frequency (f). Named for the German physicist Heinrich Rudolf Hertz, it is measured in Hertz (Hz). Higher frequency noises are typically perceived as having a higher "pitch" (variations in pitch produce a musical tune); a house alarm, for example, has a high pitch. The period, expressed in seconds, is the length of time required to complete one oscillation (repetitive cycle). Period and frequency are related by:

$$f = \frac{1}{T} (\text{Hz}) \quad (1)$$

In Figure 2, the maximum magnitude of pressure in the vertical direction symbolizes a wave's amplitude. It is in accordance with the wave's energy level. A sound's intensity is higher when its amplitude is higher. The distance (in meters) covered by a wave during one oscillation is known as its wavelength, abbreviated as λ . The wavelength is identical to the period, T , above if we plot a wave in the space domain rather than the time domain (Figure 2), where distance is represented on the horizontal axis rather than time

to examine how wave varies in space. A wave's physical size, or wavelength, can be determined by measuring the distance between two consecutive positive peaks in the cycle.

Speed of Sound, Wavelength and Frequency

Airborne sound waves normally travel at a speed of between 330 and 345 m/s. Although a rough estimate of 343 m/s is most usually used, the speed is greatly dependent on the air's temperature, humidity, and pressure.

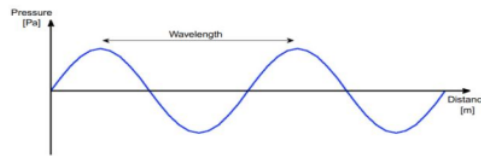


Figure 2. The graphic shows a simple wave motion, where the horizontal axis represents the distance.

Earth's surface sound speed (at 20 °C and 1 atmosphere of pressure). We may establish a link between the period (measured in seconds) and the wavelength (measured in meters) using the speed of sound, indicated by the letter c .

For a moving body:

$$\text{Distance} = \text{Speed} \times \text{Time} \quad (2)$$

So, the speed of sound, c , may be calculated from

$$c = \frac{\lambda}{T} \quad (3)$$

Therefore,

$$c = \lambda f \quad (4)$$

The wavelength of a sound wave at 1000 Hz is approximately 0.343 m. The association holds true regardless of how quickly the sound travels.

Frequency

People generally experience infrasound rather than hearing it. Sound in this frequency range can potentially result in low-frequency noise issues.

Table 1 shows the range of frequencies.

Typical Frequency Ranges for Hearing (Hz)	
Human	20 – 20,000
Dog	40 – 60,000
Typical Frequency Ranges for Hearing (Hz)	
Piano	27 - 4200
Guitar	63 - 500
Road Traffic	50 - 7000

Sound Propagation in Environment

Sounds are vibrations that travel through a medium and change its pressure as they do so. Our ears pick up on the disruption to the medium brought on by pressure variations. Therefore, the sound is any change in pressure that people can feel or hear.

The atmosphere serves as the medium for environmental noise.

The atmospheric pressure is disturbed by the wave-like phenomenon moving across the atmosphere. There are numerous sources producing noises in a mixed urban environment, and as a result, sounds are not clean. Moreover, a number of obstructions prevent sound from propagating properly. As a result, there is no particular wave pattern created by the sound waves in the surroundings [10].

Sound Absorption coefficient

Some of the incident energy of sound waves that collide with a boundary between two media is reflected from the surface, while the remaining energy is transmitted into the second medium. It is stated that some of this energy is eventually transformed into heat energy through a variety of processes and is absorbed by that medium. The absorption coefficient (α), a frequency-dependent quantity that expresses the percentage of incident energy that is absorbed, is defined as :

$$\alpha(f) = \frac{\text{sound intensity absorbed}}{\text{saound intensity incident}} \quad (5)$$

The absorption coefficient has a theoretical range of 0 to 1. In practice, values greater than 1.0 are occasionally measured. This deviation is due to the measurement methods employed to measure large-scale building materials.

A perfect sound-absorbing surface, like an open window, can absorb one sabin of sound per square meter. How much sound is absorbed by a wall or other surface depends on the surface's area, expressed in square meters, multiplied by the absorption coefficient [11]. Mineral wool added to the enclosure's inside reduced noise by 25 dB overall, which shows that adopting such absorber materials could improve the enclosure's effectiveness.

Sound Power

The rate at which sound energy is radiated per unit

time is referred to as sound power. Joules/second or Watts are used to measure the power of sound. Consider a small, spherical sound source as an illustration of sound power. The sound power is a metric for the maximum volume of sound that a source is capable of producing. The source's sound power output is the same no matter how far away you are from it if unimpeded radiation takes place and the source's sound power output is constant.

Decibel (dB)

Decibel: A unit of gain. This is used in noise as well as in communications engineering.

The sound pressure/power levels in sound engineering are measured in decibels, or dB. From a reference value, the Decibel is used to determine variations in sound pressure and power levels. The decibel is equal to 10 times the ratio of two quantities' logarithms to base 10, which is typically expressed as follows :

$$l_l = 10 \log \frac{l}{l_0} \quad (6)$$

Where l and l_0 are the two physical quantities.

Sound Power Level (SWL)

The total sound power (Watts) radiated from a source in relation to a reference power of $W_{ref} = 10^{-12}$ Watts is known as the sound power level (L_w or SWL). The following formula can be used to determine the sound power level :

$$SWL = 10 \log \frac{W}{W_{ref}} \quad (7)$$

Sound Pressure Level (SPL)

$$SPL \text{ (dB)} = 20 \log P/P_{ref} \quad (8)$$

P is term sound pressure in N/m^2

P_{ref} is the reference sound pressure = $20 \times 10^{-6} N/m^2$

Octave

the space between two sounds with a 2:1 frequency ratio. The keyboard of a typical piano has 8 octaves. Eight bands is a band of the frequency spectrum that is an octave apart. For instance, our octave band ranges from 63 to 8000 Hz.

Sound Loudness and Measurement

Weighting filters are used in sound pressure level meters (SPL meters), which minimize the contribution of low and high frequencies to give a value that roughly reflects what the human ear hears.

Pyramid Foam

Pyramid foam reduces background noise by absorbing sounds from the low to the high frequency range. In studios all around the world, foam panels are utilized to regulate the sound character rooms with diverse characteristics. Studio foam will greatly reduce echoes, reverberations, and other undesirable noises, but it won't entirely soundproof a space.

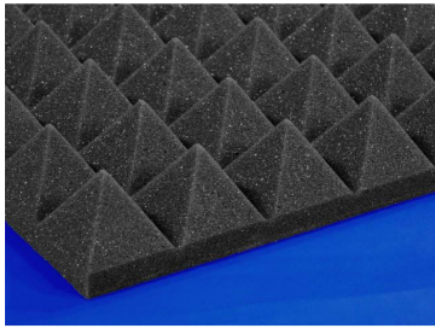


Figure 3. Polyurethane Pyramid Foam

Table 2. From Foam Factory Inc., July 2011, 11st Report of Sound Absorption Average (SAA) of the sound absorption coefficient of material for the twelve and a third octave range from 200 to 2500 Hz.

1/3 Octave Center Frequency (Hz)	Absorption Coefficient	Total Absorption in Sabin
100	0.19	13.92
125	0.19	13.71
160	0.18	12.62
200	0.20	14.38
250	0.22	16.19
315	0.23	23.67
400	0.38	27.40
500	0.45	32.71
630	0.51	36.44
800	0.55	39.62
1000	0.55	39.93
1250	0.54	38.98
1600	0.55	39.83
2000	0.60	43.31
2500	0.65	46.76
3150	0.70	50.26
4000	0.76	54.43
5000	0.86	62.09

SAA = 0.46
NRC = 0.45

Transmission Loss Of Sound

The reduction in sound level caused by a sound source as it travels through an acoustic barrier is

known as transmission loss of sound. It is measured at various frequencies as the amount of decibels that are blocked by the wall or acoustical barrier.

9

NRC (Noise Reduction Coefficient)

Simply said, the Noise Reduction Coefficient (NRC) is a measurement of how much acoustic energy, or sound, a material can absorb. We can better understand what the materials NRC tells us by using the formula below.

NRC = decibels reflected / decibels absorbed

The format of the NRC will be decimal. Let's say, for illustration, that a material has an NRC of 0.30. We are claiming that the material reflected 70% of the acoustic energy while only absorbing 30% of it. The NRC ratings of materials vary frequently depending on the frequency range. By averaging the various NRC values for each frequency band recorded, the total NRC of a material is determined.

Sound Power

Sound power and sound intensity are related by an area. For a spherical wave front, the relationship is expressed as

$$I = \frac{W}{4\pi r^2} \quad (9)$$

5

represents sound intensity, $4\pi r^2$ is the surface area of the sphere, and r is the radius of the sphere. From Equation (4), it should be noted that the decay of the sound intensity is directly proportional to the square of the radius of the sphere. This relationship is often referred to as the inverse square law. Sound intensity values are directly related to sound power values by an area term and hence also have a very wide range of values. where L_I is the sound intensity level, I is the measured intensity at some distance from the source, and I_{ref} is the reference sound intensity usually taken as :

$$L_I = 10 \log \frac{I}{I_0} \quad (10)$$

The overall noise levels of the 11st compressor package is quantified using sound pressure level (SPL) based measurements in a free field using the methodology in the international standards ISO 2151-ISO 3744/ ISO 9614-2.[12]

4

Source sound power level (Lw)

This is the initial sound power level emitted by the noise source, usually in decibels (dB). Source-receiver distance (R): The distance between the noise source and the point at which you want to calculate the side-line noise level, in this case, 200 feet. Frequency (f): The frequency of the sound, typically measured in Hertz (Hz). Environmental factors:

4



These can include atmospheric absorption, ground effects, and any other relevant factors that might affect sound propagation. With these parameters, you can use the formula for spherical spreading to calculate the sound pressure level (SPL) at the specified distance. The formula is:

$$SPL = L_w - 20 * \log_{10}(R) - 11 + 20 * \log_{10}(f)$$

Where

SPL is the sound pressure level at the specified distance.

L_w is the source sound power level.

R is the distance from the source to the receiver.

f is the frequency of the sound.

Result and Discussion

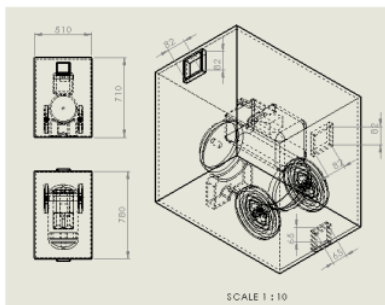


Figure 4. Sound acoustic compressor enclosure design



0

29

31

74

Sound Level (dB)	Fan On		Sound Level (dB)
	Foam Temp (°C)	Compressor Temp (°C)	
74	29	31	75

minutes when operation

Figure 5. Sound acoustic compressor enclosure

Enclosure specifications :

The enclosure is made using a hollow iron frame measuring 3 cm x 3 cm which is welded and on the wall using teak block board material with a thickness of 10 mm. The size of the enclosure box is (L x w x H): 71 x 51 x 78 cm.

Fan dimension : 15 cm x 15 cm

Inlet hole (Fan) : 8.2 cm x 8.2 cm

Outlet hole 1 (up) : 8.2 cm x 8.2 cm

Outlet hole 2 (down) : 6.5 cm x 6.5 cm



Figure 6. Compressor Multipro BC150D-DMBW

Compressor specifications :

Discharge: 126 L/MIN

Voltage/Frequency: 220 volts /50 Hz

Slider: 42 mm

Pressure: 8 Bar/116 Psi

Motor: 1.5 HP

Dimension: (LxWxH): 42 x 38 x 65 cm

Speed: 2,850 rpm

Tank: 30 L

5	35	38,9	73	34	38,9	74
10	42,1	46,5	75	38,1	42,4	75
15	49,3	52,1	76	44,4	51,8	75
20	54,6	56,5	77	46,6	55,9	76
25	58	59	77	48,9	58,7	75
30	65	67	77	51	62	76
Average	47,57	50,14	75,57	41,71	48,67	75,14

Graphical data of noise level measurement results using a sound level meter (measured at a distance of 1 meter from the outer side of the enclosure)

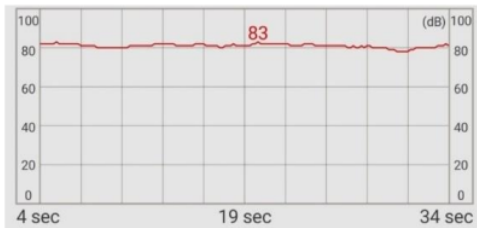


Figure 7. Sound level compressor measurement before using enclosure



Figure 8. Sound level compressor measurement after using enclosure

The figure shows that the sound intensity level of the compressor is 75 DB respectively. It indicated that the enclosure using pyramid foam absorber successfully reduced the sound noise level by 5 - 10 Db.

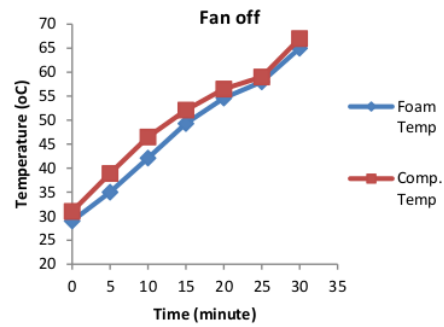


Figure 9. Temperature of inner enclosure with fan off condition

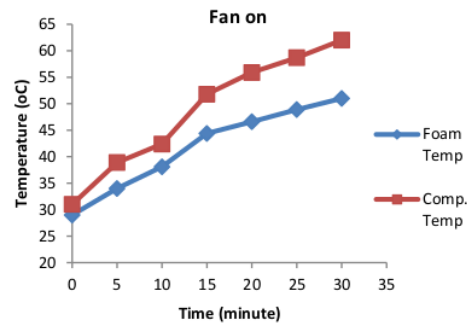


Figure 10. Temperature of inner enclosure with fan on condition

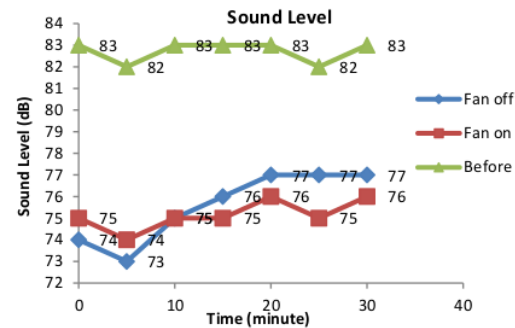


Figure 11. Sound level data before and after using

enclosure

While based on the results of room temperature measurements, the data obtained that the temperature of the enclosure room after 30 minutes of operation is 51 °C, up by 22 degrees since the compressor starts, meaning that there is significant temperature increase due to heat dissipation that occurs directly flowed out by the fan that is installed and turns on along with the operation of the compressor. The experiment results show the heat distribution that occurs in the enclosure space. From the experiment, it can be seen that the cooling fan in compressor enclosure is not good enough to make cooling down an enclosure space.

Conclusion

The experiment on the effectiveness of the enclosure in reducing the noise level of the compressor has yielded important findings. While acoustic foam was able to decrease echoes, reverberations, and some unwanted noises, it was not sufficient to completely soundproof the area. there was a 12 % decrease in noise level after using the enclosure. Li Zhang, managed to reduce the noise of the compressor to 60dB, using rock wool and glass wool, and Forouharmajd F, Nassiri P, Monazzam MR. managed to reduce the average noise of the compressor to 25 dB, using mineral wool as an extra liner on the inside of the enclosure. so, it can be concluded that the acoustic sound of the enclosure coated with mineral wool. will cause better noise reduction when compared to using polyurethane foam material. To improve the sound reduction capabilities of the enclosure, the use of other materials like rockwool was recommended. Enclosures solely coated with foam were found to be ineffective in significantly reducing sound levels. Additionally, it was observed that the enclosure space heated up quickly due to its limited dimensions, leading to potential risks such as damage to the compressor or even the risk of fire if operated for extended periods. Considering these limitations, it can be concluded that the enclosure was not successful in adequately reducing the noise level of the compressor, and its safety for long-term usage is questionable. Further measures, like incorporating larger dimensions and additional soundproofing materials, may be necessary to achieve the desired noise reduction and safety levels.

ORIGINALITY REPORT

26%
SIMILARITY INDEX

10%
INTERNET SOURCES

21%
PUBLICATIONS

5%
STUDENT PAPERS

PRIMARY SOURCES

1	Enda Murphy, Eoin A. King. "Principles of Environmental Noise", Elsevier BV, 2022 Publication	5%
2	Wei Chen, Sheng Hu, Hao Cao, Tao Huang, Xiaowen Wu, Ling Lu, Jiwen Peng. "Review on Research process of Sound reduction Materials", IOP Conference Series: Materials Science and Engineering, 2019 Publication	4%
3	ijehe.mui.ac.ir Internet Source	4%
4	Malcolm J. Crocker, Jorge P. Arenas. "Engineering Acoustics", Wiley, 2020 Publication	2%
5	Brian E. Anderson, Jonathan D. Blotter, Kent L. Gee, Scott D. Sommerfeldt. "Acoustical Measurements", Wiley, 2013 Publication	2%
6	epdf.tips Internet Source	1%

7	Submitted to Monash University Student Paper	1 %
8	ecampus.sttind.ac.id Internet Source	1 %
9	"Acoustic Textiles", Springer Science and Business Media LLC, 2016 Publication	1 %
10	Ruisen Ming, Jie Pan. "Insertion loss of an acoustic enclosure", The Journal of the Acoustical Society of America, 2004 Publication	1 %
11	Springer Handbook of Acoustics, 2014. Publication	1 %
12	Submitted to Southampton Solent University Student Paper	1 %
13	www.researchgate.net Internet Source	1 %
14	planningdocs.hackney.gov.uk Internet Source	1 %
15	issuu.com Internet Source	<1 %

