

15652-49666-3-CE_13-11-22.

by Turnitin.com ®

Submission date: 12-Nov-2022 08:25PM (UTC-0800)

Submission ID: 1952192443

File name: 15652-49666-3-CE_13-11-22.docx (1.05M)

Word count: 3224

Character count: 17845

Torsion Stability and Performance of Re-entrant Irregular Multistory Structures with Optimal Shear Wall Strengthening

Ghivari Alkindy¹, Resmi Bestari Muin²

¹ Master of Civil Engineering – Postgraduate – Universitas Mercu Buana, Jakarta
email: ghivarialkindy@gmail.com

² Master of Civil Engineering – Postgraduate – Universitas Mercu Buana, Jakarta
email: resmi.bestari@mercubuana.ac.id

Received: Revised: Accepted:

Abstract

This study aimed to reduce the torsion in the re-entrant corner structure that occurs due to the eccentricity distance between the center of mass and the center of stiffness. Three types of structures were modeled, namely regular structure (model A), re-entrant corner irregularity structure (Model B), and re-entrant corner irregular structure with shear wall strengthening (B-SWA). The shear wall strengthening in the B-SWA model was designed for dimensional optimization using the Nelder-Mead Algorithm method with topic

MatLab software. Running output from the `fminsearch` function on MatLab, the optimal shear wall dimensions for the B-SWA model are $L1 = 2.2317$ m, $L2 = 1.1611$ m.

The results of the structural analysis using the ETABS software show that the shear wall optimization carried out on the B-SWA model has succeeded in increasing the stability of the structure, namely the results of the mode mass ratio participation show a similar pattern to model A, namely in SumUX the value of 0.9019 has been reached in modal 7. Modeling optimal shear wall after performance review with pushover analysis shows that the performance of the B-SWA model has succeeded in increasing the performance seen from the Base Shear vs. Monitored Displacement value compared to models A and B.

Keywords: Torsion Stability; Structure Performance; Re-entrant corner irregular Structure; Shear Wall; Pushover; Nelder Mead Algorithm.

INTRODUCTION

Construction of high-rise buildings in Indonesia needs to consider earthquakes to ensure that the requirements of earthquake-resistant buildings are sufficiently met. Based on the shape of the structure, it is divided into two configurations, regular configuration and irregular configuration. Re-entrant corner irregularity is defined exists if inner corner projected is greater than 15% of the dimension of the structural plan of the direction (Badan Standardisasi Nasional, 2019).

Roeslin et al., (2018) in their research explained that at least 30% of irregular buildings were moderately damaged, while 40% were heavily damaged. As shown in Figure 1, based on the horizontal and vertical directions of configurations, half of the irregular building structures have torsion problems, but the configuration

with the most damage is the re-entrant corner irregularity configuration.

Study on torsional analysis of re-entrant corner irregularity that were limited to simplified assumptions (Khatiwada & Lumantarna, 2021). Divyashree & Siddappa, (2014) in their research evaluate the structure of the re-entrant irregularities by conducting reinforcement experiments only at one position, but have not discussed the optimization of the reinforcement.

Federal Emergency Management Agency describe, one of the problems with re-entrant corner is the torsion due to the different locations of the center of mass and center of stiffness of floors in building which cannot geometrically coincide for all possible earthquake directions (FEMA, 2006).

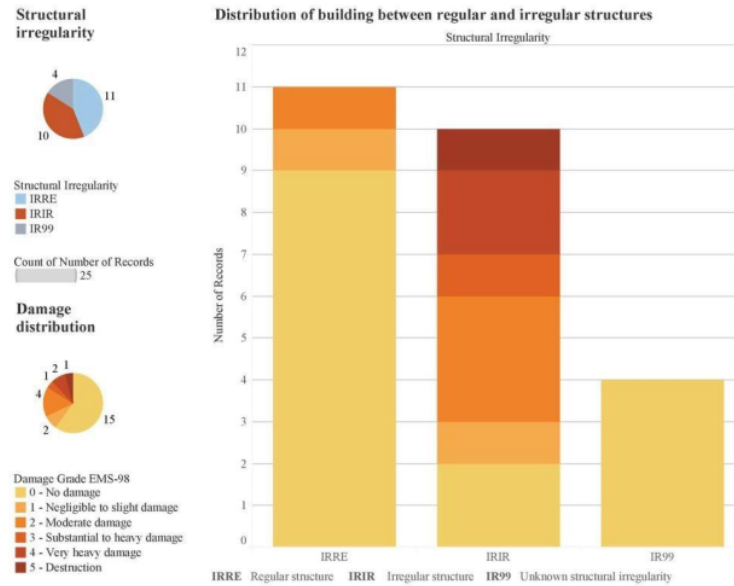


Figure 1. Distribution of damage between regular buildings and irregular building

Effects of moving a shear wall from the center of the building toward the outside of the building in a thirteen-story reinforced concrete frame-wall investigated using ETABS and SAP2000. Overall, the asymmetric model typically experienced torsional effects and larger displacement responses than the symmetric model (Bolander, 2014).

For this particular problem, Botis & Cerbu (2020) conducted an optimization of the dimensions of reinforced concrete walls using the Nelder - Mead Algorithm numerical method or also known as the Downhill Simplex method. The method aims to reduce or minimize the distance between the center of mass (CM) and the center of stiffness (CS). As has been widely known, reducing the eccentricity will prevent lateral joint - torsional movement of the structure.

Shear walls affect the stiffness and absorption of the structure. The location of the effective shear wall placement will vary depending on what percentage of the opening provides to absorption (Shahab & Gunawan, 2021).

In analyzing performance, it is necessary to use methods. (Arifin & Widyarningsih, 2021) assessing passenger satisfaction with services and performance levels of the Jak Lingko 50 Transportation by using the importance Performance Analysis (IPA) method.

The purpose and objective of this research is to determine the optimal pattern of the shear wall building systems to increase the torsional stability of the structure. In other words, efforts were made to obtain the optimum shear wall dimensions in order to avoid torsional instability in irregular structures using Nelder - Mead Algorithm numerical method. This can be achieved by assessing the relationship between torsional stability and structural performance.

RESEARCH METHODOLOGY

In this study, the adopted numerical method was carried out by Botis et al., (2018) for the case of the re-entrant corner irregular structure. As has been mentioned previously, the aim is to find out the optimal shear wall pattern for improving the performance of the re-entrant corner irregularity structure. The performance review has been processed using the Pushover method analysis. The research stages are depicted in Figure 2.

The building structure reviewed in this study is a reinforced concrete building (RC) with the addition of concrete shear walls.

Table 1 and Table 2 show the parameter quality of the material used, both for concrete as the main component and steel as the reinforcing material.

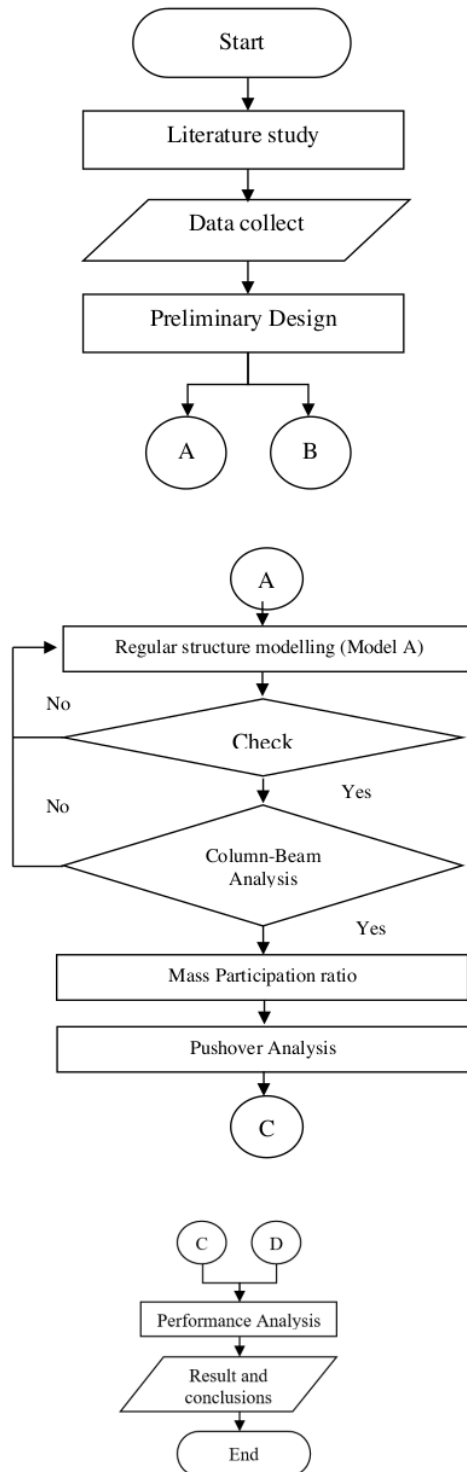


Figure 2. Research Flow Chart

Table 1. Concrete Material Data

Material	Quality	Material	Quality
Concrete	Compressive strength of		
	concrete (fc)	40 Mpa	
	Elasticity modulus (ME)	29725.41 Mpa	

Table 2. Steel Material Data

Material	Quality	Material Quality
Steel	Bending steel yield stress (fy)	410 Mpa
	Shear steel yield stress (fys)	240 Mpa
	Elasticity modulus (ME)	200000 Mpa

The load used in the calculation and input is in per metric unit. In Table 3 bellow is the data for each load based on SNI 1727:2020 (Badan Standardisasi Nasional, 2020).

Table 3. Load Data

Item	Definition	Reference
Dead load	The weight of all building construction materials installed.	
		SNI 1727:2020
Live load slab	2,4 kN/m	SNI 1727:2020
Live load roof slab	0,96 kN/m	SNI 1727:2020
Earthquake load	Using the Indonesian Spectra Design application	
	http://rsa.ciptakarya.pu.go.id/2021/	SNI 1726:2019

Structural members and foudation elements shall be designed so that their design strength equals or exceeds the effect of factored loads with the following specified combinations in Table 4.

Table 4. Load Combination

Comb 1	1,4 D+1,4 SIDL
Comb 2	1,2 D+1,2 SIDL+1,6 LL
Comb 3	1,34D+1L+1,34SIDL+1,3DX+1,3 DY
Comb 4	1,34D+1L+1,34SIDL+1,3DX+0,39DY
Comb 5	1,34D+1L+1,34SIDL-1,3 DX+0,39DY
Comb 6	1,34D+1L+1,34SIDL-1,3DX-0,39DY
Comb 7	1,34D+1L+1,34SIDL+0,39DX+1,3DY
Comb 8	1,34D+1L+1,34SIDL-0,39DX+1,3DY
Comb 9	1,34D+1L+1,34SIDL+0,39DX-1,3DY
Comb 10	1,34D+1L+1,34SIDL-0,39DX-1,3DY
Comb 11	0,76D+0,76SIDL+1,3DX+0,39DY
Comb 12	0,76D+0,76SIDL+1,3DX-0,39DY

Comb 13	$0,76D+0,76SIDL-1,3DX+0,39DY$
Comb 14	$0,76D+0,76SIDL-1,3DX-0,39DY$
Comb 15	$0,76D+0,76SIDL+0,39DX+1,3DY$
Comb 16	$0,76D+0,76SIDL-0,39DX+1,3DY$
Comb 17	$0,76D+0,76SIDL+0,39DX-1,3DY$
Comb 18	$0,76D+0,76SIDL-0,39DX-1,3DY$

Where:

D : Dead Load

Dx/y : Earthquake Load

L : Live Load

SIDL : Superimposed Dead Load

Two-building structures were modeled, first model is the regular structure (model A) as shown in Figure 3, and the second is re-entrant corner irregular structure (model B) as shown in Figure 4. The re-entrant of model were made on the sides based on the projection value of the angle of both x and y direction projections that are greater than 15%. Irregular buildings with reinforcement are made in two models, Figure 5 and Figure 6 show booth models, first is model (B SW-1), with reinforcement at the bend angle, and the second is model (B SW-2) with reinforcement at the end of the projection.

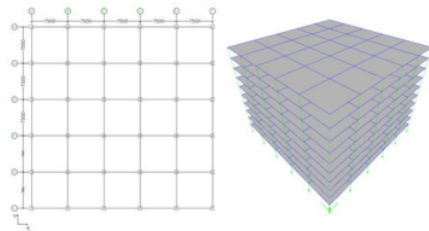


Figure 3. Regular Structure Model A Plan

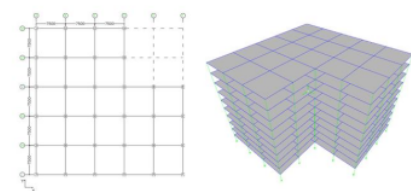


Figure 4. Irregular Structure Model B Plan

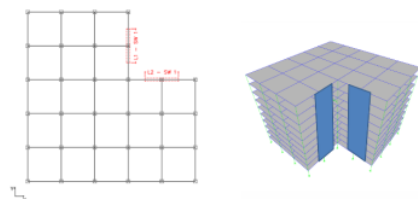


Figure 5. Model B Shear Wall Modeling Plan SW-1

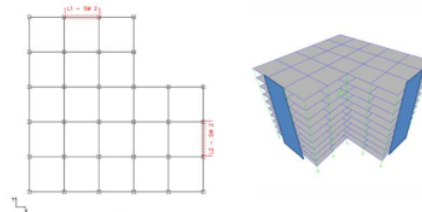


Figure 6. Model B Shear Wall Modeling Plan SW-2

Structural modeling was carried out in several stages, the results of the preliminary that have been carried out, a floor plan modeling are carried out to review its eccentricity and whether it is effective to be reviewed in this study. If it is effective enough, proceed to the next stage, while if it is not effective, a new plan is made. Then calculation of stiffness and strength was carried out using ETABS software to get the dimensions of the structure as shown in Table 5. If it meets the requirements of limit for stiffness and strength, it can be proceed to the analysis of the ratio of mass participation mode.

Table 5. Structure Dimension

Object	Floor	New dimension (mm)
Column	2	800 x 800
	3	800 x 800
	4	800 x 800
	5	800 x 800
	6	650 x 650
	7	650 x 650
	8	650 x 650
	9	550 x 550
	10	550 x 550
	roof	550 x 550
Beam	2 – 9	400 x 800
	10 – roof	350 x 700
Slab	2 – 10	180 mm

As has been mentioned previously, this study discusses the regular structure and horizontal irregular structure. In this study, torsion was observed in irregular buildings by calculating on a floor that is being reviewed as a multi-story building system. In this study, a structural model was made on the stiffness of the diaphragm using ETABS software. Manual calculation of the center of stiffness by reviewing structural properties does not depend on loading. Eccentricity was obtained by identifying the center of mass and center of stiffness

in each structural model made. The eccentricity of model A as shown in the Figure 7 and Table 6 while model B as shown in Figure 8 and

Table 6. Model A

Story	C.M (m)		C.R (m)		Ecc. (m)	
	x_m	y_m	XCR	YCR	e_x	e_y
1 - Roof	18	18	17.71	18.14	0.29	0.14

Table 7.

The modeled regular and irregular structures are then checked for their eccentricity based on the center of mass and the center of stiffness that occurs. The results of coordinate Center of Mass, Center of Stiffness in metric unit (m) and Eccentricity X,Y directions are described in

Table 6 and

Table 6. Model A

Story	C.M (m)		C.R (m)		Ecc. (m)	
	x_m	y_m	XCR	YCR	e_x	e_y
1 - Roof	18	18	17.71	18.14	0.29	0.14

Table 7.

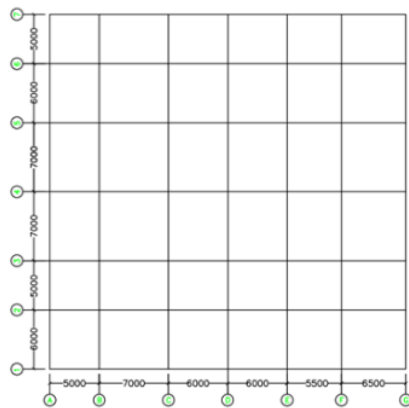


Figure 7. Model A Plan

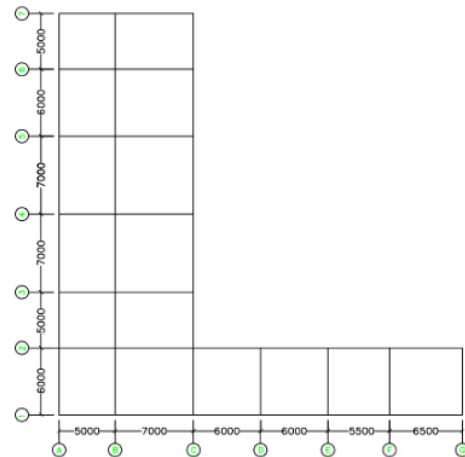


Figure 8. Model B Plan

Table 6. Model A

Story	C.M (m)		C.R (m)		Ecc. (m)	
	x_m	y_m	XCR	YCR	e_x	e_y
1 - Roof	18	18	17.71	18.14	0.29	0.14

Table 7. Model B

Story	C.M (m)		C.R (m)		Ecc. (m)	
	x_m	y_m	XCR	YCR	e_x	e_y
1 - Roof	10.5	14.2	11.48	13.97	0.98	0.28

RESULTS AND ANALYSIS

After checking that model A and model B meet the displacement requirements as shown in Figure 9 and Figure 10, then the structural reinforcement was modeled with two conditions. Model B SW-1 is reinforcement at the bent corner, and Model B SW-2 is reinforcement at the end of the projection side as shown in Figure 11.

Table 8 is the formula used to get the optimal value of the shear wall based on the eccentricity of each model as Figure 11. Where L_1 , L_2 are the optimal length of the shear wall. The shear wall optimization obtained with Nelder - Mead algorithm method or downhill simplex method, which is a commonly used to find the minimum or maximum of an objective function in a multidimensional space.

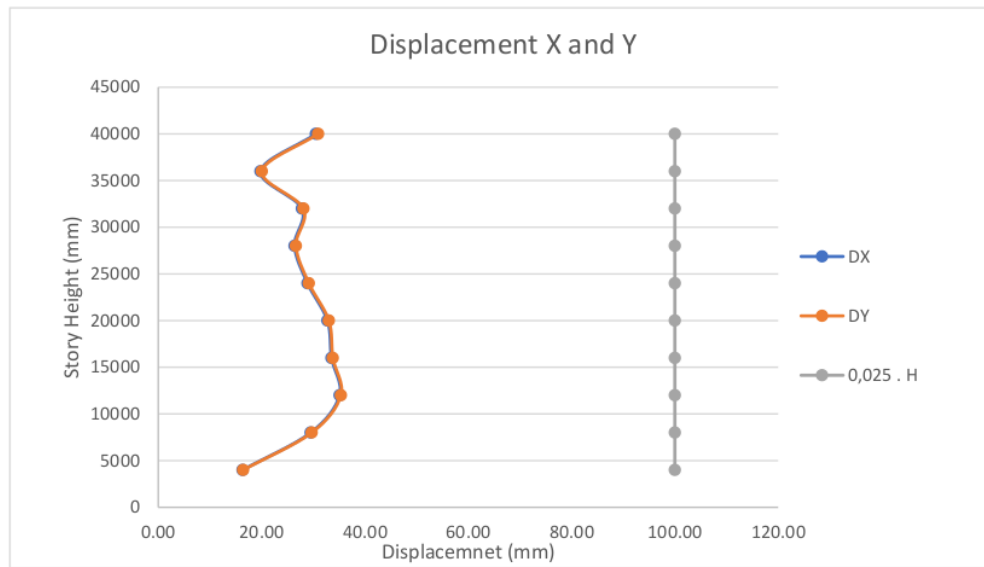


Figure 9. Model A Displacement

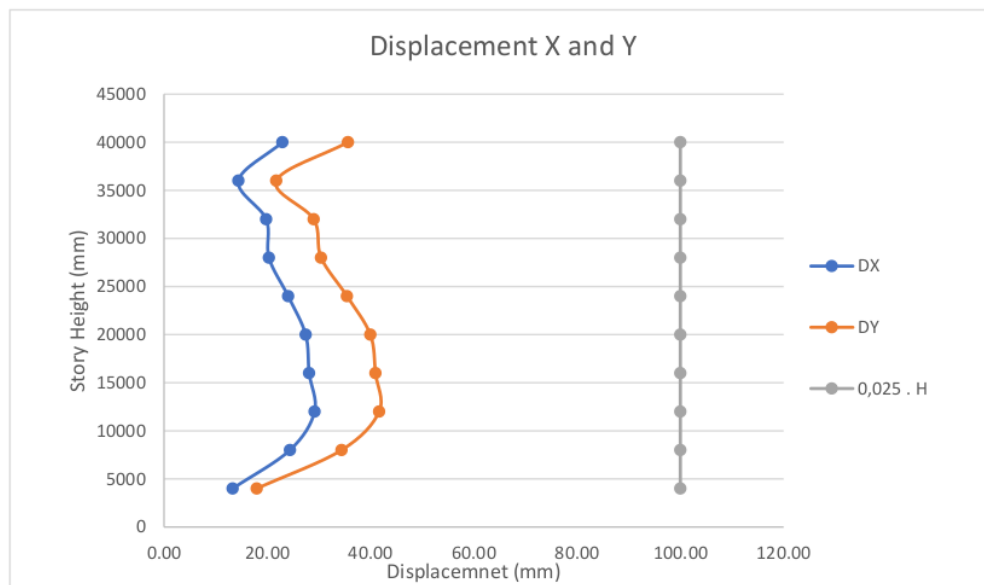


Figure 10. Model B Displacement

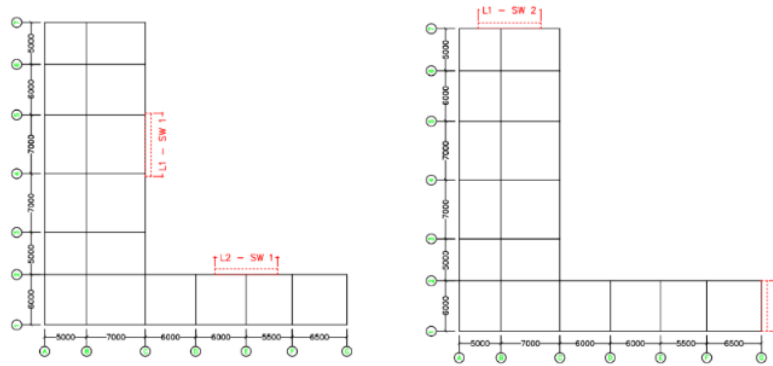


Figure 11. Modeling B SW-1 and B SW-2

Table 8. Eccentricity optimization formula Model B SW-1 and B-SW2

Model	Equation
B SW-1	$\begin{cases} f_1(L_1, L_2 = 10,5 - \left(\frac{\left(\frac{0,1 \cdot L_1^3}{12} \cdot 12 \right) + \left(\frac{0,1^3 \cdot L_2}{12} \cdot 21,5 \right) + 11,3664}{\left(\frac{0,1 \cdot L_1^3}{12} \right) + \left(\frac{0,1^3 \cdot L_2}{12} \right) + 0,9899} \right) = 0 \\ f_2(L_1, L_2 = 14,25 - \left(\frac{\left(\frac{0,1^3 \cdot L_1}{12} \cdot 24 \right) + \left(\frac{0,1 \cdot L_2^3}{12} \cdot 6 \right) + 13,824}{\left(\frac{0,1^3 \cdot L_1}{12} \right) + \left(\frac{0,1 \cdot L_2^3}{12} \right) + 0,9899} \right) = 0 \end{cases}$
B SW-2	$\begin{cases} f_1(L_1, L_2 = 10,5 - \left(\frac{\left(\frac{0,1^3 \cdot L_1}{12} \cdot 8 \right) + \left(\frac{0,1 \cdot L_2^3}{12} \cdot 36 \right) + 11,3664}{\left(\frac{0,1^3 \cdot L_1}{12} \right) + \left(\frac{0,1 \cdot L_2^3}{12} \right) + 0,9899} \right) = 0 \\ f_2(L_1, L_2 = 14,25 - \left(\frac{\left(\frac{0,1 \cdot L_1^3}{12} \cdot 36 \right) + \left(\frac{0,1^3 \cdot L_1}{12} \cdot 3 \right) + 13,824}{\left(\frac{0,1 \cdot L_1^3}{12} \right) + \left(\frac{0,1^3 \cdot L_2}{12} \right) + 0,9899} \right) = 0 \end{cases}$

Table 9. Eccentricity optimization formula Model B SW-1 and B-SW2

Model	Equation
B SW-A	$\begin{cases} f_1(L_1, L_2 = 10,5 - \left(\frac{\left(\frac{0,1 \cdot L_1^3}{12} \cdot 0 \right) + \left(\frac{0,1^3 \cdot L_2}{12} \cdot 8,5 \right) + 11,3664}{\left(\frac{0,1 \cdot L_1^3}{12} \right) + \left(\frac{0,1^3 \cdot L_2}{12} \right) + 0,9899} \right) = 0 \\ f_2(L_1, L_2 = 14,25 - \left(\frac{\left(\frac{0,1^3 \cdot L_1}{12} \cdot 3 \right) + \left(\frac{0,1 \cdot L_2^3}{12} \cdot 36 \right) + 13,824}{\left(\frac{0,1^3 \cdot L_1}{12} \right) + \left(\frac{0,1 \cdot L_2^3}{12} \right) + 0,9899} \right) = 0 \end{cases}$

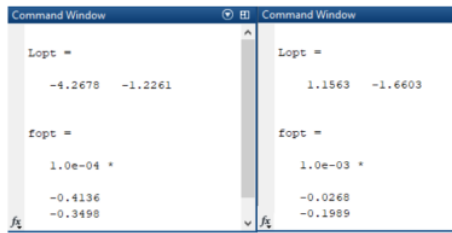


Figure 12. Result MatLab model B SW-1, B SW-2

Figure 12Error! Reference source not found. show the results of the analysis optimum shear wall length dimension (L_{opt}) for model B SW-1 and B SW-2 models of the proposed configuration, that not effective to reviewed further. So it is necessary to analyze the optimal alternative configuration model. To obtain the optimal shear wall dimensions, it is necessary to identify an alternative model by referring to the position of the center of mass and the center of stiffness that occurs, this alternative model is called the B SW-A model as shown in Figure 13 then the optimization solution was calculated in

Table 9.

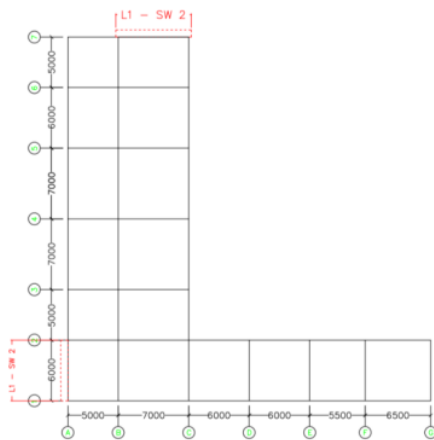


Figure 13. Modeling B SW-A

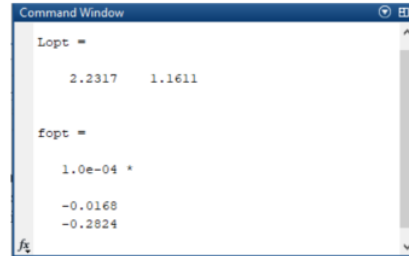


Figure 14. Result MatLab model B SW-A

The shear wall dimension optimization was carried out using the `fminsearch` function ('func', [1 1]) in MatLab software, `fminsearch` uses the simplex search method, therefore it can be used in this observation. From the results of the MatLab software data processing of model B SW-A as shown in Figure 14, the optimal value solution of shear wall length is obtained $L_1=2.2317$ m and $L_2=1.1611$ m.

Torsion stability is considered regarding the minimum amount of model to achieve a combined variance mass of 90% of the actual mass in each orthogonal horizontal direction of the response considered by the model. The results of Table 10 show a similar pattern in Models A and B SW-A, the ratio value of participation Mass model in SumUX reaches a value of 0.9187 and 0.9019 on modal 7, while model B a value of 0.9131 only occurs when modal 8. It can be interpreted that the strengthening of shear walls in model irregular B SW-A can approximate the variance in the model A as regular structure.

Table 10. Mass Participation Ratio Mode Results Recap SunUX

Mode	Model A	Model B	Model B-SWA
	SumUX	SumUX	SumUX
1	0.737	0.3024	0.3479
2	0.7666	0.6622	0.7313
3	0.7672	0.7622	0.7626
4	0.8709	0.8138	0.8218
5	0.8733	0.8589	0.8679
6	0.8734	0.8709	0.8737
7	0.9187	0.898	0.9019
8	0.9192	0.9131	0.9175
9	0.9193	0.9172	0.9196
10	0.9425	0.9342	0.9351
11	0.9429	0.9398	0.9427
12	0.9429	0.9416	0.9548

The three models that have been made previously will each be subjected to a Pushover analysis to assess the performance of the building structure. Pushover analysis made with ETABS software. The results of the pushover analysis illustrate the comparison curve of the base shear vs. monitored displacement value on the X axis (PUSH X) and Y axis (PUSH Y) of each structural model in Figure 15 for Model A, Figure 16 for Model B, and Figure 17 for model B SW-A. From each curve, the maximum total deviation and maximum inelastic deviation values are calculated to identify the structure performance level.

The performance level of the structure is determined based on the ATC-40 shown in Table 11. Performance level was obtained from the ratio of the roof drift value at the performance point to the total building height.

Table 11. Performance Level

Performance Level				
Interstory Drift Limit	Immediate Occupancy (IO)	Damage Control (DC)	Life Safety (LS)	Structural Stability
Maximum Total Drift	0,01	0,01 – 0,02	0,02	0,33 V _P
Maximum Inelastic Drift	0,05	0,05 – 0,015	No limit	No Limit

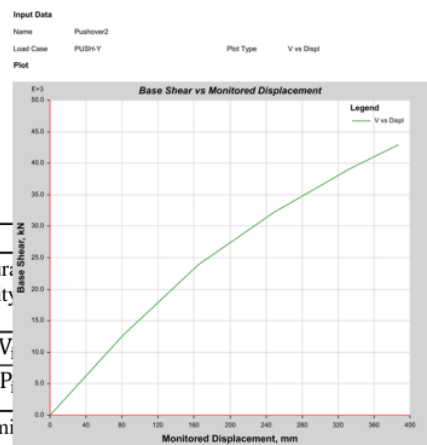
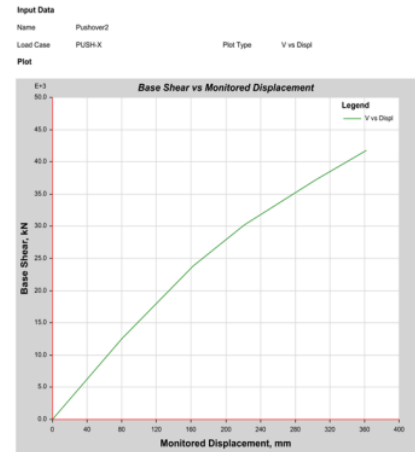


Figure 15. Base Shear vs Monitored Displacement PUSH X & PUSH Y model A

$$\text{Maximum total displacement} \\ \text{Dir. X-X} = \frac{D_t}{H_{total}} = \frac{362,323}{40.000} = 0,009058 \text{ (IO)}$$

$$\text{Dir. Y-Y} = \frac{D_t}{H_{total}} = \frac{386,877}{40.000} = 0,009672 \text{ (IO)}$$

$$\text{Maximum inelastic displacement} \\ \text{Dir. X-X} = \frac{D_t - D_1}{H_{total}} = \frac{362,323 - 80}{40.000} = 0,007058 \text{ (IO)}$$

$$\text{Dir. Y-Y} = \frac{D_t - D_1}{H_{total}} = \frac{386,877 - 80}{40.000} = 0,007672 \text{ (IO)}$$

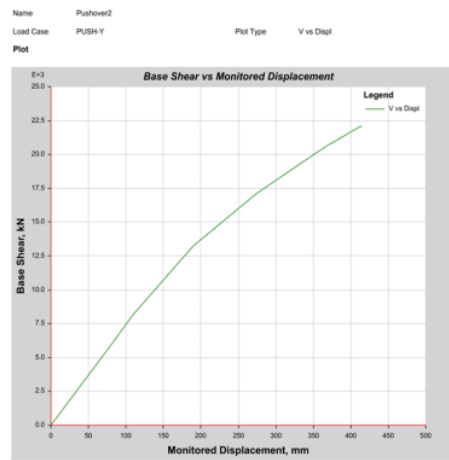
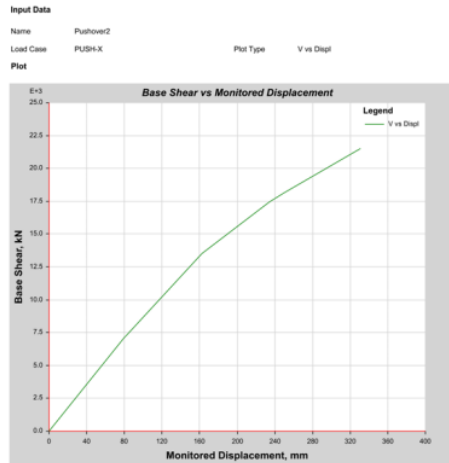


Figure 16. Base Shear vs Monitored Displacement PUSH X & PUSH Y model B

Maximum total displacement

$$\text{Dir. X-X} = \frac{D_t}{H_{total}} = \frac{331,118}{40.000} = 0,008278 \text{ (IO)}$$

$$\text{Dir. Y-Y} = \frac{D_t}{H_{total}} = \frac{414,51}{40.000} = 0,010363 \text{ (DC)}$$

Maximum inelastic displacement

$$\text{Dir. X-X} = \frac{D_t - D_1}{H_{total}} = \frac{331,118 - 80}{40.000} = 0,007479 \text{ (IO)}$$

$$\text{Dir. Y-Y} = \frac{D_t - D_1}{H_{total}} = \frac{414,51 - 80}{40.000} = 0,008363 \text{ (IO)}$$

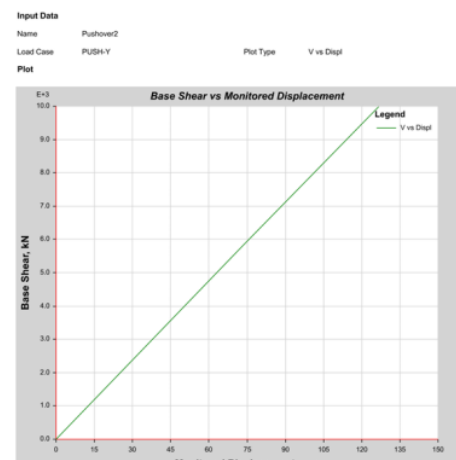
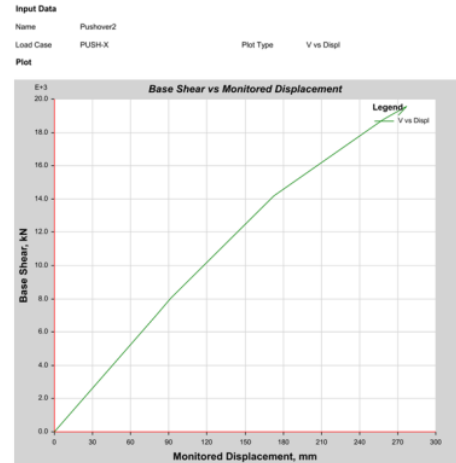


Figure 17. Base Shear vs Monitored Displacement PUSH X & PUSH Y model B SW-A

Maximum total displacement

$$\text{Dir. X-X} = \frac{D_t}{H_{total}} = \frac{270,718}{40.000} = 0,00677 \text{ (IO)}$$

$$\text{Dir. Y-Y} = \frac{D_t}{H_{total}} = \frac{126,594}{40.000} = 0,00316 \text{ (IO)}$$

Maximum inelastic displacement

$$\text{Dir. X-X} = \frac{D_t - D_1}{H_{total}} = \frac{270,718 - 80}{40.000} = 0,00477 \text{ (IO)}$$

$$\text{Dir. Y-Y} = \frac{D_t - D_1}{H_{total}} = \frac{126,594 - 80}{40.000} = 0,00116 \text{ (IO)}$$

16

CONCLUSION

Based on the analysis that has been done, the results obtained as an answer to the formulation of this research problem. Three different types of buildings are

modeled, regular structures (model A), irregular structures without reinforcement (model B), and irregular structures with shear wall reinforcement (B SW-1, B SW-2). The following are the results obtained in this study.

1. The four structural models made in this research method, then the formulation of the ideal shear wall reinforcement position for the re-entrant irregular structure is model B SW-A, with the position of the shear wall on the coordinates of the X axis and Y axis (0; 3) m, and (8.5; 36) m, with 0.1 m thickness. The results of the Nelder-Mead algorithm with MatLab software for model B SW-A, obtained the optimal shear wall width $L1 = 2.2317$ m and $L2 = 1.1611$ m.
2. The results of mass participation for model A, the ratio of 0.9187 occurred in mode 7. Then in model B, the ratio of 0.9192 occurred in mode 8. While in model B SW-A, the ratio of 0.9019 occurred in mode 7. These results show the 90% ratio in B SW-A occurs faster than model B. Thus the optimal shear wall reinforcement effect modeled as model B SW-A is able to increase the torsional stability of the re-entrant irregularity structure.
3. Three structural models that are further reviewed (Model A, Model B, and Model B SW-A) to be analyzed using the Pushover method, the maximum total drift ratio of the model A direction X = 0.009058, direction Y = 0.009672. In model B, direction X = 0.008278, direction Y = 0.010363, then in model B SW-A direction X = 0.00677, direction Y = 0.00316. In terms of performance level based on ATC-40, the optimal shear wall reinforcement can improve the performance of the re-entrant irregularity structure based on the maximum total drift value in the Y direction of 0.010363 categorized as Damage Control (DC) to 0.00316, categorized as Immediate Occupancy (IO).

From the results of the research that has been done, it can be submitted recommendation that can be done in further research to develop previous research.

The shear wall analysis which has a relatively large size in this study has not

considered the effect of shear deformation and rotational inertia, as discussed in a previous study regarding the analysis of the frequency of natural vibrations in cantilever beams using Timoshenko's theory. (Bestari & Nasution, 2010).

REFERENCES

- Arifin, & Widyarningsih, N. (2021). Analisis Kinerja Dan Kepuasan Pelayanan Terhadap Moda Transportasi Microtrans Jak Lingko (Puri Kembangan - Kalideres). *SOSTECH, 1*, 410–418.
- Badan Standardisasi Nasional. (2019). Sni 1726-2019. In *Tata Cara Perencanaan Ketahanan Gempa Untuk Struktur Bangunan Gedung dan Non Gedung*.
- Badan Standardisasi Nasional. (2020). Beban desain minimum dan Kriteria terkait untuk bangunan gedung dan struktur lain (SNI 1727:2020). In *Badan Standardisasi Nasional 1727:2020*.
- Bestari, R., & Nasution, A. (2010). Frekuensi Getar Alami Balok Kantilever Timoshenko. *Jurnal Teknik Sipil, 11*(4), 171. <https://doi.org/10.5614/jts.2004.11.4.3>
- Bolander, J. C. (2014). Investigation of Torsional Effects on Thirteen-Story Reinforced Concrete Frame-Wall Structure Modeled in ETABS and SAP2000 Using Linear and Nonlinear Static and Dynamic Analyses. *UC San Diego Electronic Theses and Dissertations*, 214.
- Botis, M. F., & Cerbu, C. (2020). A method for reducing of the overall torsion for reinforced concrete multi-storey irregular structures. *Applied Sciences (Switzerland)*, 10(16). <https://doi.org/10.3390/app10165555>
- Botis, M. F., Cerbu, C., & Shi, H. (2018). Study on the reduction of the general / overall torsion on multi – story, rectangular, reinforced concrete structures. <https://doi.org/doi:10.1088/1757-899X/399/1/012005>
- Divyashree, M., & Siddappa, G. (2014). Seismic Behavior of RC Buildings with Re-entrant Corners and Strengthening. *IOSR Journal of Mechanical and Civil Engineering*, 2278–1684. www.iosrjournals.org
- FEMA. (2006). Designing for earthquakes. *Computer-Aided Engineering, 12*(5).
- Khatiwada, P., & Lumantarna, E. (2021). Simplified Method of Determining

8 Torsional Stability of the Multi-Storey Reinforced Concrete Buildings. *CivilEng*, 2(2), 290–308. <https://doi.org/10.3390/civileng2020016>
Roeslin, S., Ma, Q. T. M., & García, H. J. (2018). Damage assessment on buildings following the 19th september 2017 puebla, Mexico earthquake. *Frontiers in*

Built Environment, 4(December), 1–18. <https://doi.org/10.3389/fbuil.2018.00072>
Shahab, Z. A., & Gunawan, G. F. (2021). Pengaruh Variasi Persentase Bukaam Terhadap Daya Serap Dinding Geser. *Rekayasa Sipil*, 10(1), 34. <https://doi.org/10.22441/jrs.2021.v10.i1.05>

ORIGINALITY REPORT

19%

SIMILARITY INDEX

15%

INTERNET SOURCES

12%

PUBLICATIONS

10%

STUDENT PAPERS

PRIMARY SOURCES

1

publikasi.mercubuana.ac.id

Internet Source

4%

2

docplayer.net

Internet Source

1%

3

Submitted to Loughborough University

Student Paper

1%

4

etd.aau.edu.et

Internet Source

1%

5

www.researchgate.net

Internet Source

1%

6

eprints.uty.ac.id

Internet Source

1%

7

link.springer.com

Internet Source

1%

8

Submitted to London School of Economics
and Political Science

Student Paper

1%

9

minerva-access.unimelb.edu.au

Internet Source

1%

10	tel.archives-ouvertes.fr Internet Source	1 %
11	imanagerpublications.com Internet Source	1 %
12	Livian Teddy, Husnul Hidayat, Dessu Andriyali A. "The study of shear wall uses in buildings during the architecture design process", IOP Conference Series: Earth and Environmental Science, 2021 Publication	1 %
13	adoc.pub Internet Source	1 %
14	Jian Xue, ShuWen Xu. "Parameters estimation based on moments and Nelder-Mead algorithm for compound-Gaussian clutter with inverse Gaussian texture", 2016 IEEE International Conference on Signal Processing, Communications and Computing (ICSPCC), 2016 Publication	1 %
15	Submitted to University of Balamand Student Paper	<1 %
16	P Y Putri, Candra. "Assessment of the structure of public elementary school 28 Air Tawar Timur Padang", IOP Conference Series: Earth and Environmental Science, 2021 Publication	<1 %

17

Xiapin Hua, Ron Mase. "Design of Industrial Equipment Support Structures—Considering Interactions between Equipment and Structures", Structures Congress 2018, 2018

Publication

<1 %

18

Submitted to Swinburne University of Technology

Student Paper

<1 %

19

Yong Mao Huang, Shuai Ding, Guoan Wang, Maurizio Bozzi. "Compact Equal-Width Equal-Length Phase Shifter With Slow-Wave Half-Mode Substrate Integrated Waveguide for 5G Applications", IEEE Access, 2019

Publication

<1 %

20

sostech.greenvest.co.id

Internet Source

<1 %

21

"Proceedings of the Second International Conference of Construction, Infrastructure, and Materials", Springer Science and Business Media LLC, 2022

Publication

<1 %

22

H. P. Hong. "Torsional Responses under Bidirectional Seismic Excitations: Effect of Instantaneous Load Eccentricities", Journal of Structural Engineering, 2013

Publication

<1 %

23

Jati Sunaryati, Nidiasari Nidiasari, Rifqi Yuliandri. "Performance-based-plastic design method of reinforced concrete structure for operational performance level", E3S Web of Conferences, 2021

Publication

<1 %

24

Shehata E. Abdel Raheem, Momen M. M. Ahmed, Mohamed M. Ahmed, Aly G. A. Abdel-Shafy. "Seismic performance of L-shaped multi-storey buildings with moment-resisting frames", Proceedings of the Institution of Civil Engineers - Structures and Buildings, 2018

Publication

<1 %

25

"Minimum Design Loads and Associated Criteria for Buildings and Other Structures", American Society of Civil Engineers (ASCE), 2022

Publication

<1 %

26

sinta3.ristekdikti.go.id

Internet Source

<1 %

27

"Minimum Design Loads and Associated Criteria for Buildings and Other Structures", American Society of Civil Engineers (ASCE), 2017

Publication

<1 %

28

Natasya Amalia, Yushar, Winda Yursilla. "Study of vulnerability three-story school

<1 %

buildings with reinforced concrete
construction in Banda Aceh to earthquake
and tsunami hazards", E3S Web of
Conferences, 2022

Publication

29	journal.eng.unila.ac.id Internet Source	<1 %
30	journals.itb.ac.id Internet Source	<1 %
31	ejurnalunsam.id Internet Source	<1 %
32	nepjol.info Internet Source	<1 %
33	www.researchsquare.com Internet Source	<1 %
34	Ida Ayu Made Budiwati, Made Sukrawa, Ida Wahyuni. "Numerical study on seismic behaviour of reinforced concrete structures with steel brace and infill wall", AIP Publishing, 2018 Publication	<1 %
35	www.mdpi.com Internet Source	<1 %
36	"Seismic Behaviour and Design of Irregular and Complex Civil Structures III", Springer Science and Business Media LLC, 2020	<1 %

Publication

Exclude quotes	Off	Exclude matches	Off
Exclude bibliography	Off		

GRADEMARK REPORT

FINAL GRADE

/0

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7

PAGE 8

PAGE 9

PAGE 10

PAGE 11

PAGE 12